

STEVAL-ISA190V1

38 V, 1.5 A synchronous step-down switching regulator evaluation board based on A6986F

Data brief



Features

- AECQ100 qualification
- 1.5 A DC output current
- 4 V to 38 V operating input voltage
- Low consumption mode or low noise mode
- Programmable Iskip current
- 30 μ A I_Q at light load (LCM V_{IN} = 12 V and V_{OUT} = 3.3 V)
- 8 µA IQ-SHTDWN
- Adjustable f_{SW} (250 kHz 2 MHz)
- Output voltage adjustable from 0.85 V to V_{IN}
- Embedded output voltage supervisor
- Synchronization
- Adjustable soft-start time
- Internal current limiting
- Overvoltage protection

- Output voltage sequencing
- Peak current mode architecture
- $R_{DS(on)HS} = 180 \text{ m}\Omega$; $R_{DS(on)LS} = 150 \text{ m}\Omega$
- Thermal shutdown
- RoHS compliant

Description

The STEVAL-ISA190V1 is a product evaluation board based on ST's synchronous step-down switching regulator A6986F.

The device is capable of delivering up to 1.5 A and its 100% duty cycle capability to withstand the cold crank event along with its wide input operating voltage range make A6986F the ideal choice for battery powered automotive systems.

Synchronous rectification improves efficiency at full load as well as application compactness, while high-frequency switching (programmable up to 2 MHz) lowers power passive costs and size while remaining outside of the AM band.

The device can operate in low consumption mode (LCM) with quiescent current as low as 30 μ A at $V_{\text{IN}} = 12$ V and $V_{\text{OUT}} = 3.3$ V, hence assuring high efficiency at light loads, as required in typical car body applications that remain active while the car is parked. A low noise mode (LNM) can alternatively be selected to meet the forced PWM mode requirement under all loading conditions for infotainment applications.

The default evaluation board settings are 6 V output voltage configured in LCM, 500 kHz switching frequency, high level Iskip current and the switchover feature disabled. These configurations can easily be changed by the user to evaluate different application scenarios.

Schematic diagram STEVAL-ISA190V1

1 Schematic diagram

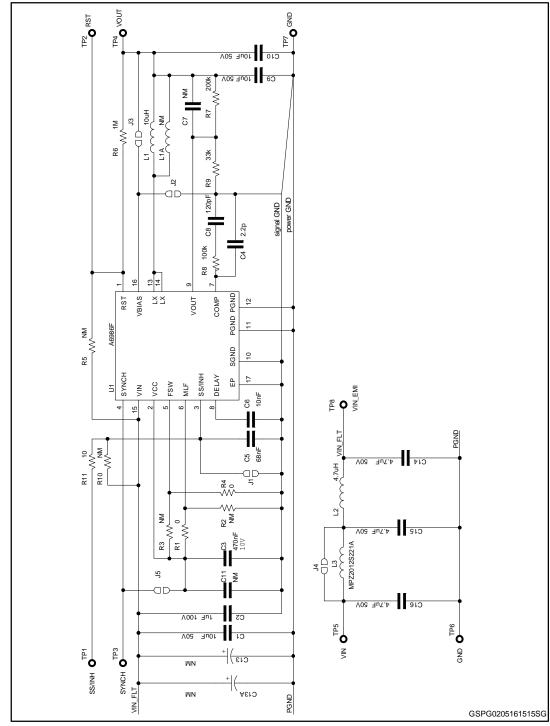


Figure 1: STEVAL-ISA190V1 circuit schematic



Table 1: BOM details

Table 1. Bow details				
Reference	Description	Part number	Manufacturer	
C1, C9, C10	10 µF 50 V X5R 10%	CGA5L3X5R1H106K	TDK	
C2	1 μF 100 V X7S 10%	C2012X7S2A105K	TDK	
C3	470 nF 10 V X7R 10%			
C4	2.2 pF 10 V X7R 10%			
C5	68 nF 10 V X7R 10%			
C6	10 nF 10 V X7R 10%			
C7, C11, C13, C13A	NOT MOUNTED			
C8	120 pF 10 V X7R 10%			
C14, C15, C16	4.7 μF 50 V X5R 10%	CGA5L3X5R1H475K	TDK	
L1	10 μH	XAL5050-103MEC	Coilcraft	
L2	4.7 μH	XAL4030-472MEC	Coilcraft	
L3	EMC BEAD	MPZ2012S221A	TDK	
R2, R3, R5, R9, R10	NOT MOUNTED			
R1, R4, R7	0R			
R6	1 Meg 1%			
R8	100k 1%			
R11	10R 1%			
J1	SS/INH control	OPEN		
J5	Iskip set to High Level	OPEN		
J2	Switchover Disabled	CLOSED		
J3		OPEN		
J4		OPEN		
U1	A6986F		STMicroelectronics	

Revision history STEVAL-ISA190V1

2 Revision history

Table 2: Document revision history

Date	Version	Changes
04-May-2016	1	Initial release.

IMPORTANT NOTICE - PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2016 STMicroelectronics - All rights reserved

